




1500LB



Structure

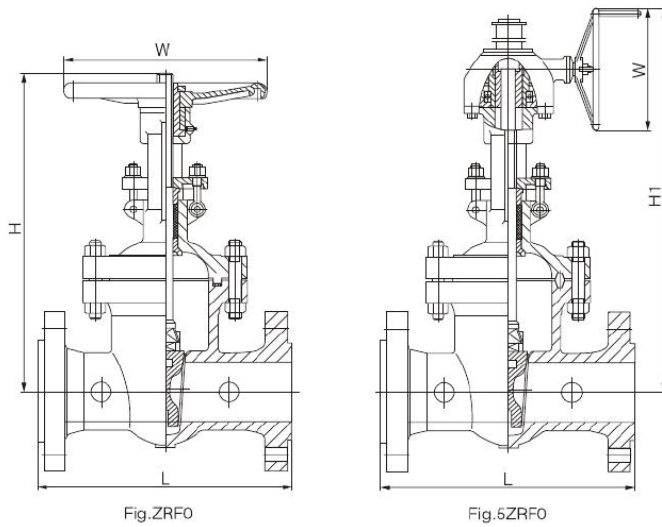

Pressure: Class900-1500

Bolted bonnet

Flexible wedge gate

8° and above: two piece yoke

Class900: 16° and above

Class1500: 12° and above

Gear operated

Wenzhou Kerui Valve Industry Co., LTD

Address:

No.1 Tantou Village, Yongqiang High-tech Park, Longwan District, Wenzhou City, China

Post Code: 328024

Tel: +86-577-86928881 / +86-577-86990007

Fax: +86-577-86912312

E-mail: sale@createvalve.com / offer@createvalve.com



Main dimensions & Weight

Size		Dimensions						Weight (kg)		(N.m)	Cv
mm	in	L(RF)	L(RW)	L(RM)	H	H1	W	RF	RM	Torqu e	
40	1-1/ 2	305	305	305	495	-	25 0	62	45	32	-
50	2	368	368	371	582	-	25 0	116	95	54	-
65	2-1/ 2	419	419	422	635	-	35 0	161	130	76	-
80	3	470	470	473	781	-	35 0	209	193	108	600
100	4	546	546	549	876	-	45 0	296	250	167	1070
150	6	705	705	711	110 4	-	61 0	720	652	426	2500
200	8	832	832	841	114 2	-	72 0	1275	113 4	801	4370
250	10	991	991	1000	178 4	-	86 0	2092	176 5	1268	6850
300	12	1130	1130	1146	-	195 5	76 0	2951	238 6	2078	9980
350	14	1257	1257	1276	-	205 7	76 0	4382	375 9	2392	12000
400	16	1384	1384	1407	-	231 1	76 0	5043	-	-	15675
450	18	1537	1537	1559	-	243 8	86 0	5705	-	-	20640
500	20	1664	1664	1686	-	259 0	86 0	6750	-	-	25880
600	24	1943	1943	1972	-	294 6	86 0	9500	-	-	37175

Wenzhou Kerui Valve Industry Co., LTD

Address:

No.1 Tantou Village, Yongqiang High-tech Park, Longwan District, Wenzhou City, China

Post Code: 328024

Tel: +86-577-86928881 / +86-577-86990007

Fax: +86-577-86912312

E-mail: sale@createvalve.com / offer@createvalve.com